


WALKWAY FIXING OPTIONS

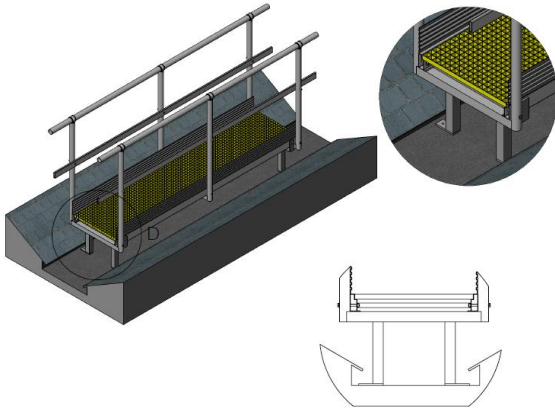


Pedestal Fixing

Often used for gutter cleaning or access; a bespoke pedestal can be manufactured to allow the maximum possible walkway width even on narrow gutters.


Free Standing

Where a roof cannot be penetrated I.e. membrane or asbestos roofs, a spreader bar with a rubber insert can be used to effectively spread the loads.

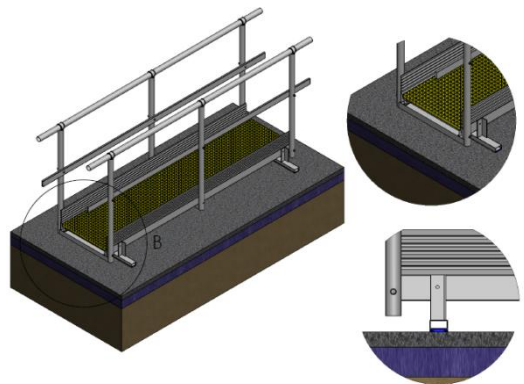

Penetrative Fixing

If the roof is of a suitable structure, I.e. steel profile or concrete roof, bespoke fixing brackets can be manufactured to secure the walkway directly to the roof structure

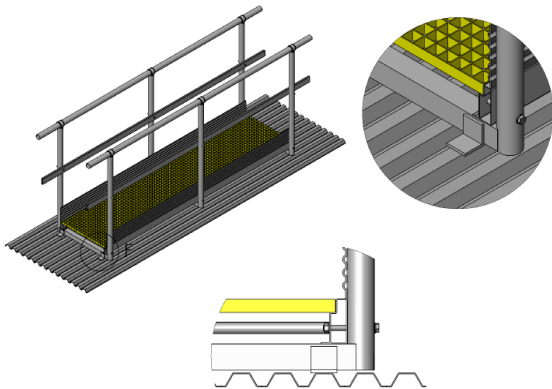

Raised Seam

For most raised seam profile roofs, a clamp bracket is used to quickly and securely fasten the walkway to the profile of the roof seam.

