



# ZIG ZAG LADDER: ROOF ACCESS SPECIFICATION SHEET

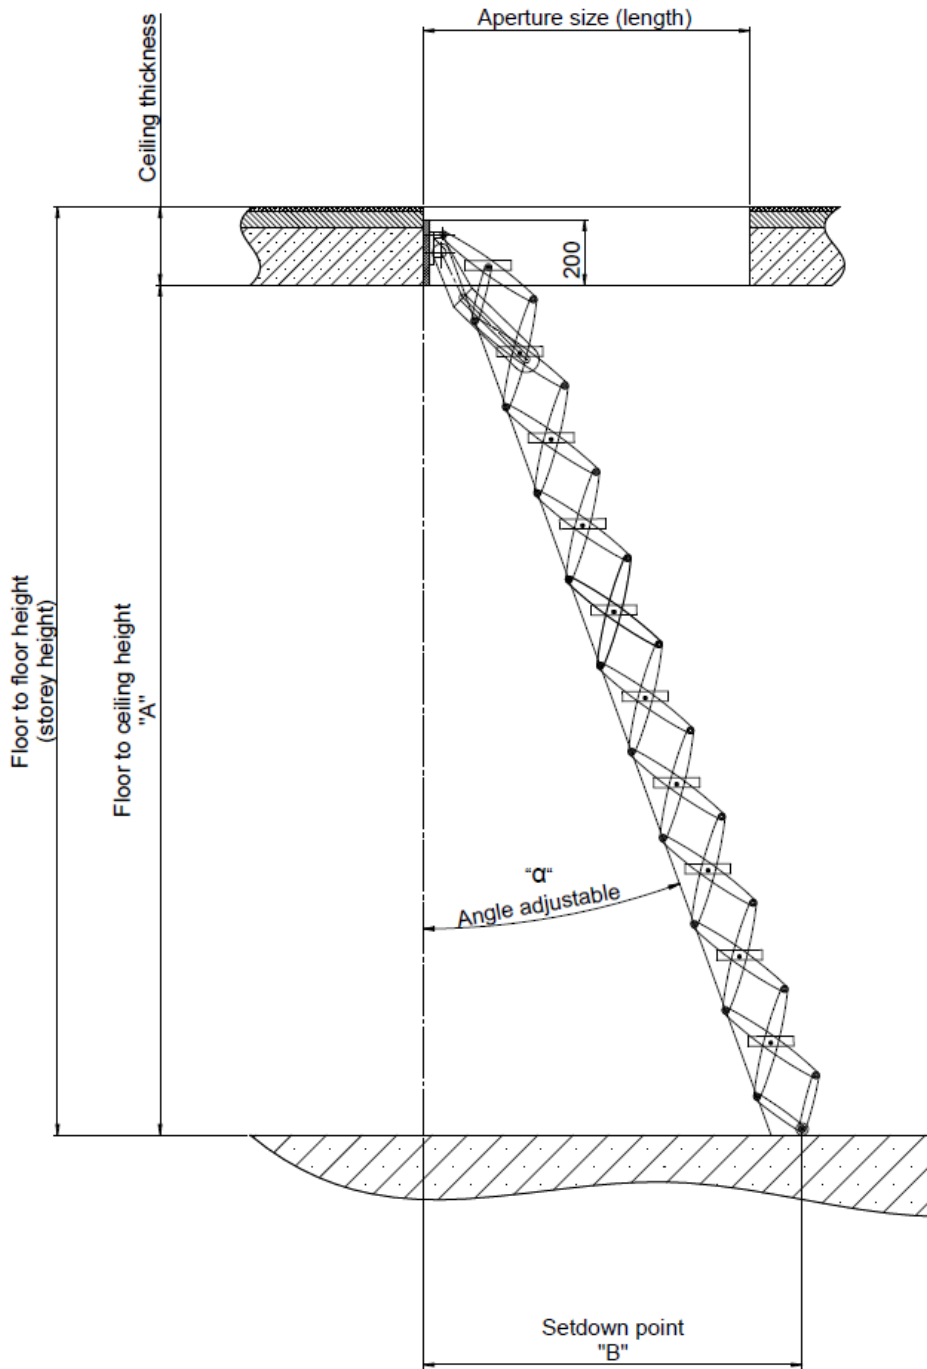

Treads	Floor to Ceiling (Dim 'A')	Minimum Aperture Width	Minimum Aperture Length	Setdown Point ( $\alpha = 20^\circ$ Dim 'B')
9	2200 - 2500	590	620	1130
10	2501 - 2790	590	670	1240
11	2791 - 3090	590	750	1340
12	3091 - 3390	590	820	1450

# ZIG ZAG LADDER: ROOF ACCESS SPECIFICATION SHEET

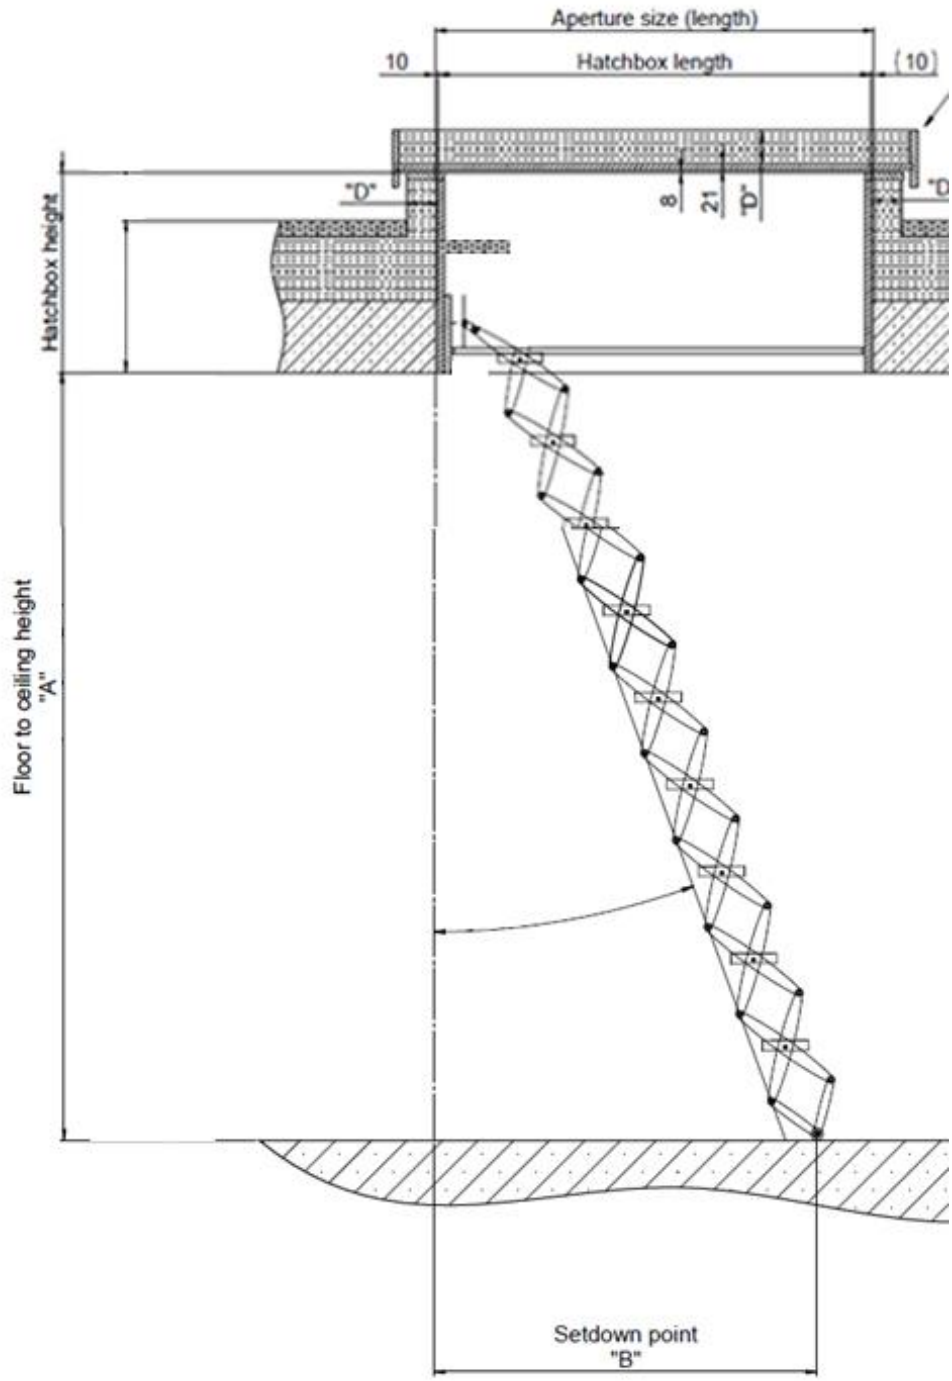

Treads	Floor to Ceiling (Dim 'A')	Minimum Aperture Width	Minimum Aperture Length	Setdown Point ( $\alpha = 20^\circ$ Dim 'B')
9	2200 - 2500	590	620	1130
10	2501 - 2790	590	670	1240
11	2791 - 3090	590	750	1340
12	3091 - 3390	590	820	1450